




Foot Pedal

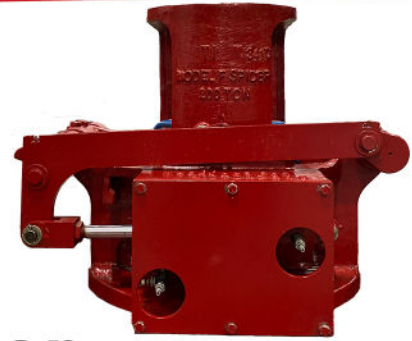


Model "F" Spider

Texas International MFG

Features & Applications

The Model "F" Pneumatic Spider can handle API tubing, casing and drill pipe sizes from 2-3/8" to 8-5/8" and can be operated by the remote foot valve. The load capacity for the Model "F" Spider is 200 Ton.

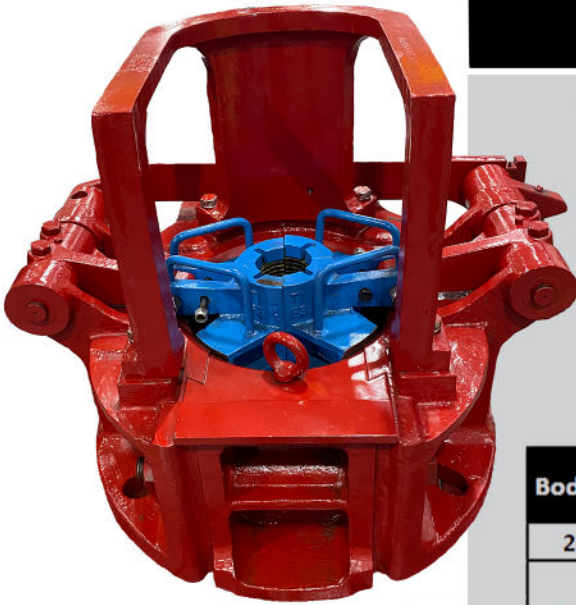

Size Range	2-3/8" - 8-5/8"
Operating Air Pressure	60 - 80 PSI

Body Size	Pipe Size	Net Weight LBS	Part Number
2-3/8" - 8-5/8"		1175	T-TF100-S (Body less slips)
3-1/2"	2-3/8"	149	T-TF651-3.500X2.375 (Inserts)
	2-7/8"	145	T-TF651-3.500X2.875 (Inserts)
	3-1/2"	141	T-TF600-FCR-3.500 (Slips & Inserts)
5-1/2"	4-1/2"	169	T-TF651-5.500X4.500 (Inserts)
	5"	161	T-TF651-5.500X5.000 (Inserts)
	5-1/2"	154	T-TF600-FCR-5.500 (Slips & Inserts)
7-5/8"	6-5/8"	200	CF-0710-0610-0 (Inserts)
	7"	205	CF-0710-0700-0 (Inserts)
	7-5/8"	192	T-TF600-FCR-7.625 (Slips & Inserts)
8-5/8"	8-5/8"	143	T-TF150-R-8.625 (Slips & Inserts)

Spare parts available upon request
 Non-marking dies available upon request

PRODUCT DESCRIPTION

Part No: T-TF100-S
Size Range: 2-3/8" - 8-5/8"
Weight less slips: 1175 lbs.



We Stock TI Manufactured handling tools backed by Expertise, MPI and In-House Load Test Certification.

Call now for a quote: 281-447- 3980