




Deutz Turbo 3.6, 4 Cyl. Diesel Power Unit - Tier 4 Final

**Skid Mounted Hydraulic Power Unit
Texas International Mfg**

Features & Applications

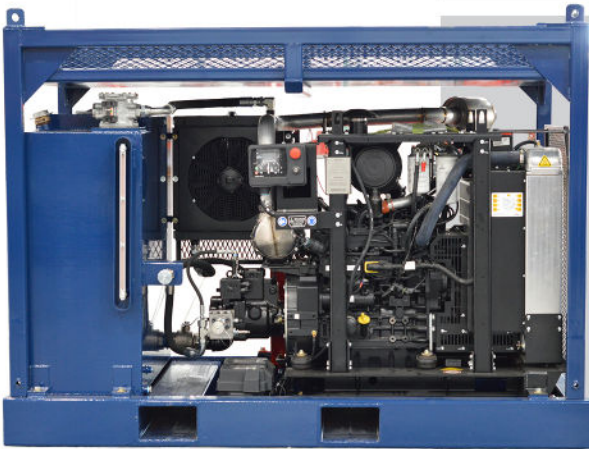

Deutz 4 cylinder, Diesel powered with Electric Start, skid mounted hydraulic power unit.

- Hydraulic Output: 60 gpm
- Pump Options: Single Stage or Dual Stage
- Murphy Controller
- Hydraulic Cooler
- E-Stop w/ 100' lead cable ESD
- 100' of 1" & 1.25" Hydraulic Hoses

Specifications

Part No: TDTCD3.6
Weight: 3,800 lbs.
Length: 98"
Width: 52"
Height: 72"

Item	Power (hp)	Speed (rpm)	Torque (ft/lbs)	Oil/filter change (hrs)	Fuel Consumption
Diesel Engine	74	2300	288	500	5.6 gph

Tanks	Features	Volume (gal)	Working (gal)	Recommended
				Operating Temp (°F)
Hydraulic	Sight and temperature gauges	180	118	100 - 130
	Filtered breather			
	Top access hatch			
	Fully welded steel construction			
Diesel	Top access filler	35	33	N/A
	Fully welded steel construction			
	Sight and temperature gauges			
	Filtered breather			



We Stock TI Manufactured handling tools backed by Expertise, MPI and In-House Load Test Certification.

Call now for a quote: 281-447- 3980