




Oilfield Tools, LTD



Starr 6-1/4" Power Tong

Starr Power Tongs

Features & Applications

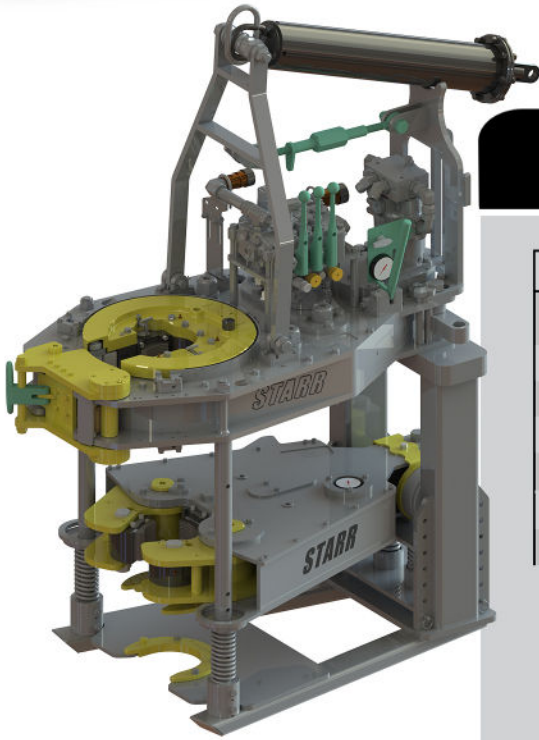

TORQUE - Rineer 15IN ³ 35K Tong					RPM - Rineer 15IN ³ 35K Tong				
Press.	Speed 1	Speed 2	Speed 3	Speed 4	GPM	Speed 1	Speed 2	Speed 3	Speed 4
PSI	ft-lb.	ft-lb.	ft-lb.	ft-lb.					
2000	28,360	5,002	14,180	2,501	10	1.6	8.8	3.1	17.7
2250	31,905	5,628	15,953	2,814	20	3.1	17.7	6.2	35.3
2500	35,450	6,253	17,725	3,126	40	6.2	35.3	12.5	70.6
2750	38,996	6,878	19,498	3,439	60	9.3	53	18.7	105.9
3000	42,541	7,503	21,270	3,752	NOTE - 2 Options Available 6 1/4" 35 - (1 Handle - 2 Capped Valves) 6 1/4" 35-BR (Ready to Receive Backup)				

PRODUCT DESCRIPTION

Part No: Varies

Size Range: 2-1/16" - 6-1/4"

Weight:
with b/u: 2,850 lbs. (1,293 kg)
w/o b/u: 1,750 lbs. (794 kg)

	Motor Shift	Tong Transmission Shift
Speed 1	Low Gear	Low Gear
Speed 2	Low Gear	High Gear
Speed 3	High Gear	Low Gear
Speed 4	High Gear	High Gear

	6-1/4" Tong	w/ Backup
Capacity	2 3/8" - 6 1/4"	2 3/8" - 6 1/4"
Width	29.5"	33.7"
Length	52.63"	55"
Height	47.6"	69.3"
Weight (lb.)	1,750lb	2850lb
Rated Pressure	2,500 psi	
Rated Torque	35,000 ft-lb.	
Handle Length	32.5"	

BACKUP JAWS AVAILABLE: 2 3/8" - 6 1/4"
(Other sizes available upon request)



We Stock TI Manufactured handling tools backed by Expertise, MPI and In-House Load Test Certification.

Call now for a quote: 281-447- 3980